

JeFaPaTo - A joint toolbox for blinking analysis and facial features extraction

Tim Büchner ¹✉, Oliver Mothes ¹, Orlando Guntinas-Lichius ², and Joachim Denzler ¹

¹ Computer Vision Group, Friedrich Schiller University Jena, 07743 Jena, Germany ² Department of Otorhinolaryngology, Jena University Hospital, 07747 Jena, Germany ✉ Corresponding author

DOI: [10.21105/joss.06425](https://doi.org/10.21105/joss.06425)

Software

- [Review](#) 
- [Repository](#) 
- [Archive](#) 

Editor: Samuel Forbes 

Reviewers:

- [@mprib](#)
- [@draabe](#)

Submitted: 22 January 2024

Published: 03 May 2024

License

Authors of papers retain copyright and release the work under a Creative Commons Attribution 4.0 International License ([CC BY 4.0](https://creativecommons.org/licenses/by/4.0/)).

Summary

Analyzing facial features and expressions is a complex task in computer vision. The human face is intricate, with significant shape, texture, and appearance variations. In medical contexts, facial structures and movements that differ from the norm are particularly important to study and require precise analysis to understand the underlying conditions. Given that solely the facial muscles, innervated by the facial nerve, are responsible for facial expressions, facial palsy can lead to severe impairments in facial movements ([Lou et al., 2020](#); [Volk et al., 2017](#)).

One affected area of interest is the subtle movements involved in blinking ([Nuutila et al., 2021](#); [VanderWerf et al., 2003](#); [VanderWerf et al., 2007](#)). It is an intricate spontaneous process that is not yet fully understood and needs high-resolution, time-specific analysis for detailed understanding ([Cruz et al., 2011](#); [Kwon et al., 2013](#)). However, a significant challenge is that many computer vision techniques demand programming skills for automated extraction and analysis, making them less accessible to medical professionals who may not have these skills. The Jena Facial Palsy Toolbox (JeFaPaTo) has been developed to bridge this gap. It utilizes cutting-edge computer vision algorithms and offers a user-friendly interface for those without programming expertise. This toolbox makes advanced facial analysis more accessible to medical experts, simplifying integration into their workflow.

This simple-to-use tool could enable medical professionals to quickly establish the blinking behavior of patients, providing valuable insights into their condition, especially in the context of facial palsy or Parkinson's disease ([Nuutila et al., 2021](#); [VanderWerf et al., 2007](#)). Due to facial nerve damage, the eye-closing process might be impaired and could lead to many undesirable side effects. Hence, more than a simple distinction between open and closed eyes is required for a detailed analysis. Factors such as duration, synchronicity, velocity, complete closure, the time between blinks, and frequency over time are highly relevant. Such detailed analysis could help medical experts better understand the blinking process, its deviations, and possible treatments for better eye care.

Statement of need

To analyze the blinking behavior in detail, medical experts often use high-speed cameras to record the blinking process. Existing tools modeling the eye state based on the Eye-Aspect-Ratio (EAR), such as Soukupova ([2016](#)), only classify the eye state as open or closed, requiring a labeled dataset for training a suitable classifier. This approach neglects relevant information such as the blink intensity, duration, or partial blinks, which are crucial for a detailed analysis in a medical context. Moreover, this simple classification approach does not factor in high temporal resolution video data, which is essential for a thorough analysis of the blinking process as most blinks are shorter than 100 ms. We developed JeFaPaTo to go beyond the simple

eye state classification and offer a method to extract complete blinking intervals for detailed analysis. We aim to provide a custom tool that is easy for medical experts, abstracting the complexity of the underlying computer vision algorithms and high-temporal processing and enabling them to analyze blinking behavior without requiring programming skills. An existing approach by Kwon et al. (2013) for high temporal videos uses only every frame 5 ms and requires manual measuring of the upper and lower eyelid margins. Other methods require additional sensors such as electromyography (EMG) or magnetic search coils to measure the eyelid movement (VanderWerf et al., 2003; VanderWerf et al., 2007). Such sensors necessitate additional human resources and are unsuitable for routine clinical analysis. JeFaPaTo is a novel approach that combines the advantages of high temporal resolution video data (Kwon et al., 2013) and computer vision algorithms (Soukupova, 2016) to analyze the blinking behavior.

Overview of JeFaPaTo

JeFaPaTo is a Python-based (Van Rossum & Drake, 2009) program to support medical and psychological experts in analyzing blinking and facial features for high temporal resolution video data. We follow a two-way approach to encourage programmers and non-programmers to use the tool. On the one hand, we provide a programming interface for efficiently processing high-temporal resolution video data, automatic facial feature extraction, and specialized blinking analysis functions. This interface is extendable, allowing the easy addition of new or existing facial feature-based processing functions (e.g., mouth movement analysis (Hochreiter et al., 2023) or MRD1/MRD2 (Chen et al., 2021)). On the other hand, we offer a graphical user interface (GUI) entirely written in Python to enable non-programmers to use the full analysis functions, visualize the results, and export the data for further analysis. All functionalities of the programming interface are accessible through the GUI with additional input validations, making it easy for medical experts to use. JeFaPaTo is designed to be extendable and transparent and is under joint development by computer vision and medical experts to ensure high usability and relevance for the target group.

JeFaPaTo leverages the `mediapipe` library (Kartynnik et al., 2019; Lugaresi et al., 2019) to extract facial landmarks and blend shape features from video data at 60 FPS (on modern hardware). With the landmarks, we compute the EAR (Eye-Aspect-Ratio) (Soukupova, 2016) for both eyes over the videos. Additionally, JeFaPaTo detects blinks, matches the left and right eye, and computes medically relevant statistics. Furthermore, a visual summary for the video is provided in the GUI, shown in Figure 1, and the data can be exported in various formats for further independent analysis. The visual summary lets medical experts quickly get an overview of the blinking behavior. As shown in Figure 1, the blinks per minute are shown as a histogram over time in the upper axis, and the delay between blinks is shown in the right axis. The main plot comprises the scatter plot of the EAR score for the left and right eye, and the dots indicate the detected blinks, with the rolling mean and standard deviation shown as a line plot. This summary creates a compact overview by summarizing the blinking behavior throughout the video, enabling a quick individualized analysis for each video.

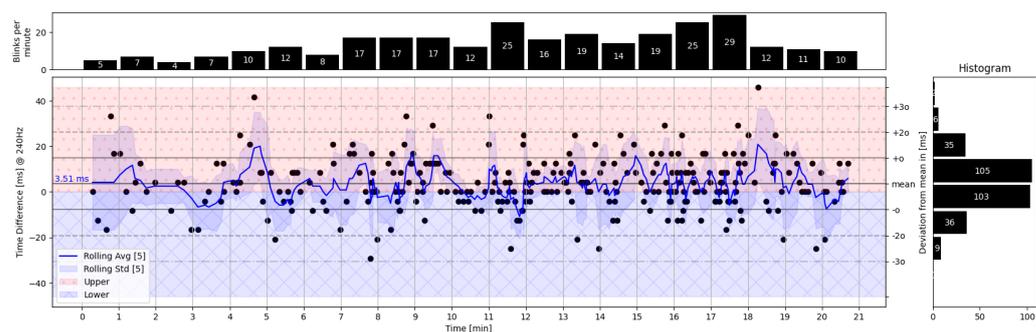


Figure 1: The plot presents a visual summary of blinking patterns captured over 20 minutes, recorded at 240 frames per second (FPS). It illustrates the temporal variation in paired blinks, quantifies the blink rate as blinks per minute, and characterizes the distribution of the time discrepancy between left and right eye closures.

We leverage PyQt6 (Riverbank Computing Limited, 2023; The Qt Company, 2023) and pyqtgraph (Campagnola, 2020) to provide a GUI on any platform for easy usage. To support and simplify the usage of JeFaPaTo, we provide a standalone executable for Windows, Linux, and MacOS. JeFaPaTo is currently used in three medical studies to analyze the blinking process of healthy probands and patients with facial palsy and Parkinson’s disease.

Functionality and Usage

JeFaPaTo was developed to support medical experts in extracting, analyzing, and studying blinking behavior. Hence, the correct localization of facial landmarks is of high importance and the first step in the analysis process of each frame. Once a user provides a video in the GUI, the tool performs an automatic face detection, and the user can adapt the bounding box if necessary. Due to the usage of mediapipe (Kartynnik et al., 2019; Lugaresi et al., 2019), the tool can extract 468 facial landmarks and 52 blend shape features. To describe the state of the eye, we use the Eye-Aspect-Ratio (EAR) (Soukupova, 2016), a standard measure for blinking behavior computed based on the 2D coordinates of the landmarks. The ratio ranges between 0 and 1, where 0 indicates a fully closed eye and higher values indicate an open eye, while we observed that most people have an EAR score between 0.2 and 0.4. This measure describes the ratio between the vertical and horizontal distance between the landmarks, resulting in a detailed motion approximation of the upper and lower eyelids. Please note that all connotations for the left and right eye are based on the subject’s viewing perspective.

We denote this measure as EAR-2D-6, and the six facial landmarks are selected for both eyes, as shown in Figure 2. They are computed for each frame without any temporal smoothing. As mediapipe (Kartynnik et al., 2019; Lugaresi et al., 2019) belongs to the monocular depth reconstruction approaches for faces, each landmark contains an estimated depth value. We offer the EAR-3D-6 feature as an alternative, computed from 3D coordinates of the landmarks, to leverage this information to minimize the influence of head rotation. However, the first experiments indicated that the 2D approach is sufficient to analyze blinking behavior.



Figure 2: Visualization of the Eye-Aspect-Ratio for the left (blue) and right (red) eye inside the face.

JeFaPaTo optimizes io-read by utilizing several queues for loading and processing the video,

assuring adequate RAM usage. The processing pipeline extracts the landmarks and facial features, such as the EAR score for each frame, and includes a validity check ensuring that the eyes have been visible. On completion, all values are stored in a CSV file for either external tools or for further processing by JeFaPaTo to obtain insights into the blinking behavior of a person, shown in Figure 1. The blinking detection and extraction employ the `scipy.signal.find_peaks` algorithm (Virtanen et al., 2020), and the time series can be smoothed if necessary. We automatically match the left and right eye blinks based on the time of apex closure. Additionally, we use the prominence of the blink to distinguish between complete and partial blinks based on a user-provided threshold (for each eye) or an automatic threshold computed using Otsu's method (Otsu, 1979). The automatic threshold detection uses all extracted blinks for each eye individually. Considering the personalized nature of blinking behavior, a graphical user interface (GUI) is provided, enabling experts to adjust the estimated blinking state as needed manually. Additional functions are included in calculating blinking statistics: the blink rate (blinks per minute), the mean and standard deviation of the Eye Aspect Ratio (EAR) score, the inter-blink delay, and the blink amplitude. A graphical user interface (GUI) for the JeFaPaTo codebase is provided, as depicted in Figure 3, to facilitate usage by individuals with limited programming expertise and to streamline data processing.



Figure 3: The graphical user interface (GUI) designed for blinking analysis utilizes the Eye Aspect Ratio (EAR) metric. This interface comprises four primary components.

In Figure 3, we show the blinking analysis graphical user interface composed of four main areas. We give a short overview of the functionality of each area to provide a better understanding of the tool's capabilities. The A-Area is the visualization of the selected EAR time series for the left (drawn as a blue line) and right eye (drawn as a red line) over time. Additionally, after successful blinking detection and extraction, the detected complete blinks (pupil not visible) are shown as dots, and partial blinks (pupil visible) as triangles. If the user selects a blink in the table in the B-Area, the graph automatically highlights and zooms into the corresponding area to a detailed analysis.

The B-Area contains the main table for the blinking extraction results, and the user can select the a blink to visualize the corresponding time range in the EAR plot. The table contains the main properties of the blink: the EAR score at the blink apex, the prominence of the blink, the internal width in frames, the blink height, and the automatically detected blinking state (none, partial, complete). If the user provides the original video, the user can drag and drop the video into the GUI into the D-Area, and the video will jump to the corresponding frame to

manually correct the blinking state. The content of the table is used to compute the blinking statistics and the visual summary. These statistics are also shown in the B-Area at different tabs, and the user can export the data as a CSV or Excel file for further analysis.

The C-Area is the control area, where the user can load the extracted EAR scores from a file and select the corresponding columns for the left and right eye (an automatic pre-selection is done). The user can choose the parameters for the blinking extraction, such as the minimum prominence, distance between blinks, and the minimum blink width. Additionally, users can define the decision threshold for estimating 'partial' blinks should the 'auto' mode prove inadequate. Upon data extraction, corrections to the blinking state can be made directly within the table, following which the computation of blinking statistics and the generation of the visual summary can be initiated.

The D-Area displays the current video frame, given that the user supplies the original video. While this feature is optional, it helps manually correct the blinking state when required.

Extracted Medically Relevant Statistics

We provided a set of relevant statistics for medical analysis of blinking behavior, which are valuable to healthcare experts. The JeFaPaTo software is being developed in partnership with medical professionals to guarantee the included statistics are relevant. Future updates may incorporate new statistics based on expert medical feedback. A sample score file is available in the `examples/` directory within the repository, enabling users to evaluate the functionality of JeFaPaTo without recording a video.

Statistic	Description	Unit/Range
EAR_Before_Blink_left_avg	The average left eye EAR score three seconds before the first blink	[0, 1]
EAR_Before_Blink_right_avg	The average right eye EAR score three seconds before the first blink	[0, 1]
EAR_left_min	The minimum left eye EAR score of the time series	[0, 1]
EAR_right_min	The minimum right eye EAR score of the time series	[0, 1]
EAR_left_max	The maximum left eye EAR score of the time series	[0, 1]
EAR_right_max	The maximum right eye EAR score of the time series	[0, 1]
Partial_Blink_threshold_left	The threshold to distinguish partial or complete state	[0, 1]
Partial_Blink_threshold_right	The threshold to distinguish partial or complete state	[0, 1]
Prominence_min	The minimum prominence value of all blinks (left and right eye)	[0, 1]
Prominence_max	The maximum prominence value of all blinks (left and right eye)	[0, 1]
Prominence_avg	The average prominence value of all blinks (left and right eye)	[0, 1]
Width_min	The minimum width value of all blinks (left and right eye)	[0, 1]
Width_max	The maximum width value of all blinks (left and right eye)	[0, 1]
Width_avg	The average width value of all blinks (left and right eye)	[0, 1]

Statistic	Description	Unit/Range
Height_min	The minimum height value of all blinks (left and right eye)	[0, 1]
Height_max	The maximum height value of all blinks (left and right eye)	[0, 1]
Height_avg	The average height value of all blinks (left and right eye)	[0, 1]
Partial_Blink_Total_left	The amount of partial blinks for the left eye	\mathbb{N}
Partial_Blink_Total_right	The amount of partial blinks for the right eye	\mathbb{N}
Partial_Frequency_left_bpm	The frequency per minute of partial left blinks through out the video	1/min
Partial_Frequency_right_bpm	The frequency per minute of partial right blinks through out the video	1/min
Blink_Length_left_ms_avg	The mean value of the blink length of the left eye	Time in <i>ms</i>
Blink_Length_left_ms_std	The standard deviation value of the blink length of the left eye	Time in <i>ms</i>
Blink_Length_right_ms_avg	The mean value of the blink length of the right eye	Time in <i>ms</i>
Blink_Length_right_ms_std	The standard deviation value of the blink length of right left eye	Time in <i>ms</i>
Partial_Blinks_min[NN]_left	The amount of partial blinks in the left eye during minute <i>NN</i> of the video	\mathbb{N}
Partial_Blinks_min[NN]_right	The amount of partial blinks in the right eye during minute <i>NN</i> of the video	\mathbb{N}
Complete_Blink_Total_left	The amount of complete blinks in the left eye during minute <i>NN</i> of the video	\mathbb{N}
Complete_Blink_Total_right	The amount of complete blinks in the right eye during minute <i>NN</i> of the video	\mathbb{N}
Complete_Frequency_left_bpm	The frequency per minute of complete left blinks through out the video	1/min
Complete_Frequency_right_bpm	The frequency per minute of complete right blinks through out the video	1/min
Complete_Blinks_min[NN]_left	The amount of complete blinks in the left eye during minute <i>NN</i> of the video	\mathbb{N}
Complete_Blinks_min[NN]_right	The amount of complete blinks in the right eye during minute <i>NN</i> of the video	\mathbb{N}

Platform Support

As JeFaPaTo is written in Python, it can be used on any platform that supports Python and the underlying libraries. We recommend the usage of anaconda ([“Anaconda Software Distribution,” 2020](#)) to create encapsulated Python environments to reduce the interference of already installed libraries and possible version mismatches. The script `dev_init.sh` automatically creates the custom environment with all dependencies with the `main.py` as the entry point for running the JeFaPaTo. The user can also use the `requirements.txt` file to install the dependencies manually, even though we recommend creating a virtual environment at the very least. As JeFaPaTo is designed to be used by medical experts, we provide a graphical user interface (GUI) to simplify usage during clinical studies and routine analysis. We give each release a standalone executable for Windows 11, Linux (Ubuntu 22.04), and MacOS (version 13+ for Apple Silicon and Intel). We offer a separate branch for MacOS version pre-13 (Intel), which does not contain blend shape extraction, to support older hardware. The authors and medical partners conduct all user interface and experience tests on Windows 11 and MacOS 13+ (Apple Silicon).

Libraries

We list the main libraries used in JeFaPaTo and their version used for the development.

Library	Version	Category	Usage
numpy	≥ 1.19	Processing	Image matrices and time series
opencv-python-headless	≥ 4.5	Processing	Image processing
protobuf	$\geq 3.11, < 4$	Processing	Loading of precomputed models
psutil	~ 5.8	Processing	Computation of RAM requirements
mediapipe	$= 0.10.8$	Extraction	Facial Feature Extraction
scipy	~ 1.11	Extraction	Extraction of blinks
pandas	~ 1.5	File Handling	Loading and storing of files
openpyxl	~ 3.1	File Handling	Support for Excel Files
matplotlib	~ 3.7	Plotting	Creation of summary graphs
qtpy	~ 2.3	GUI	Simplified Qt interface for Python
qtawesome	~ 1.1	GUI	FontAwesome Icons Interface for Qt
PyQt6	$\sim 6.5.3$	GUI	Qt Interface for Python
PyQt6-Qt6	$\sim 6.5.3$	GUI	Qt Library
pyqtgraph	~ 0.13	GUI	Graph Visualization
pyqtconfig	~ 0.9	GUI	Saving and loading of user change settings
pluggy	~ 1.0	GUI	Hook configuration between JeFaPaTo and GUI
structlog	~ 21.5	Logging	Structured logging of information for development
rich	~ 12.0	Logging	Colored logging
plyer	~ 2.1	Notifications	Notification for the user for completed processing

Extraction Parameter Recommendations

The following parameters are recommended the blinking detection based on the current implementation of JeFaPaTo. We list the settings for 30 FPS and 240 FPS videos and the time

based parameters are measured in frames. These settings can be adjusted in the GUI to adapt to the specific video data and the blinking behavior of the subject, if necessary.

Parameter	30 FPS	240 FPS
Minimum Distance	10 Frames	50 Frames
Minimum Prominence	0.1 EAR Score	0.1 EAR Score
Minimum Internal Width	4 Frames	20 Frames
Maximum Internal Width	20 Frames	100 Frames
Maximum Matching Distance	15 Frames	30 Frames
Partial Threshold Left	0.18 EAR Score	0.18 EAR Score
Partial Threshold Right	0.18 EAR Score	0.18 EAR Score
Smoothing Window Size	7	7
Smoothing Polynomial Degree	3	3

Ongoing Development

JeFaPaTo finished the first stable release and will continue to be developed to support the analysis of facial features and expressions. Given the potential of high temporal resolution video data to yield novel insights into facial movements, we aim to incorporate standard 2D measurement-based features into our analysis. An issue frequently associated with facial palsy is synkinesis, characterized by involuntary facial muscle movements concurrent with voluntary movements of other facial muscles, such as the eye closing involuntarily when the patient smiles. Hence, a joint analysis of the blinking pattern and mouth movement could help better understand the underlying processes. The EAR is sensitive to head rotation. Care must be taken when recording the video to reduce the influence of head rotation, but it is not always possible. To support the analysis of facial palsy patients, we plan to implement a 3D head pose estimation to correct the future EAR score for head rotation.

Acknowledgements

Supported by Deutsche Forschungsgemeinschaft (DFG - German Research Foundation) project 427899908 BRIDGING THE GAP: MIMICS AND MUSCLES (DE 735/15-1 and GU 463/12-1). We acknowledge the helpful feedback for the graphical user interface development and quality-of-life requests from Lukas Schuhmann, Elisa Furche, Elisabeth Hentschel, and Yuxuan Xie.

References

- Anaconda software distribution. (2020). In *Anaconda Documentation* (Vers. 2-2.4.0). Anaconda Inc. <https://docs.anaconda.com/>
- Campagnola, L. (2020). PyQtGraph: Scientific graphics and GUI library for python. In *GitHub repository*. GitHub. <https://github.com/pyqtgraph/pyqtgraph>
- Chen, H.-C., Tzeng, S.-S., Hsiao, Y.-C., Chen, R.-F., Hung, E.-C., & Lee, O. K. (2021). Smartphone-Based Artificial Intelligence-Assisted Prediction for Eyelid Measurements: Algorithm Development and Observational Validation Study. *JMIR mHealth and uHealth*, 9(10), e32444. <https://doi.org/10.2196/32444>
- Cruz, A. A. V., Garcia, D. M., Pinto, C. T., & Cechetti, S. P. (2011). Spontaneous eyeblink activity. *The Ocular Surface*, 9(1), 29–41. [https://doi.org/10.1016/s1542-0124\(11\)70007-6](https://doi.org/10.1016/s1542-0124(11)70007-6)

- Hochreiter, J., Hoche, E., Janik, L., Volk, G. F., Leistrütz, L., Anders, C., & Guntinas-Lichius, O. (2023). Machine-Learning-Based Detecting of Eyelid Closure and Smiling Using Surface Electromyography of Auricular Muscles in Patients with Postparalytic Facial Synkinesis: A Feasibility Study. *Diagnostics*, *13*(3), 554. <https://doi.org/10.3390/diagnostics13030554>
- Kartynnik, Y., Ablavatski, A., Grishchenko, I., & Grundmann, M. (2019). Real-time Facial Surface Geometry from Monocular Video on Mobile GPUs. *ArXiv*, *abs/1907.06724*. <https://doi.org/10.48550/arXiv.1907.06724>
- Kwon, K.-A., Shipley, R. J., Edirisinghe, M., Ezra, D. G., Rose, G., Best, S. M., & Cameron, R. E. (2013). High-speed camera characterization of voluntary eye blinking kinematics. *Journal of the Royal Society, Interface*, *10*(85), 20130227. <https://doi.org/10.1098/rsif.2013.0227>
- Lou, J., Yu, H., & Wang, F.-Y. (2020). A Review on Automated Facial Nerve Function Assessment From Visual Face Capture. *IEEE Transactions on Neural Systems and Rehabilitation Engineering*, *28*(2), 488–497. <https://doi.org/10.1109/TNSRE.2019.2961244>
- Lugaresi, C., Tang, J., Nash, H., McClanahan, C., Uboweja, E., Hays, M., Zhang, F., Chang, C.-L., Yong, M., Lee, J., Chang, W.-T., Hua, W., Georg, M., & Grundmann, M. (2019). MediaPipe: A framework for perceiving and processing reality. *Third Workshop on Computer Vision for AR/VR at IEEE Computer Vision and Pattern Recognition (CVPR) 2019*. <https://doi.org/10.48550/arXiv.1906.08172>
- Nuutila, S., Eklund, M., Joutsa, J., Jaakkola, E., Mäkinen, E., Honkanen, E. A., Lindholm, K., Nojonen, T., Ihalainen, T., Murtomäki, K., Nojonen, T., Levo, R., Mertsalmi, T., Scheperjans, F., & Kaasinen, V. (2021). Diagnostic accuracy of glabellar tap sign for Parkinson's disease. *Journal of Neural Transmission*, *128*(11), 1655–1661. <https://doi.org/10.1007/s00702-021-02391-3>
- Otsu, N. (1979). A threshold selection method from gray-level histograms. *IEEE Transactions on Systems, Man, and Cybernetics*, *9*(1), 62–66. <https://doi.org/10.1109/TSMC.1979.4310076>
- Riverbank Computing Limited. (2023). *PyQt6*. <https://www.riverbankcomputing.com/software/pyqt/>
- Soukupova, T. (2016). *Real-Time Eye Blink Detection using Facial Landmarks*. 8. <https://api.semanticscholar.org/CorpusID:35923299>
- The Qt Company. (2023). *Qt*. <https://www.qt.io/>
- Van Rossum, G., & Drake, F. L. (2009). *Python 3 reference manual*. CreateSpace. ISBN: 1441412697
- VanderWerf, F., Brassinga, P., Reits, D., Aramideh, M., & Ongerboer de Visser, B. (2003). Eyelid movements: Behavioral studies of blinking in humans under different stimulus conditions. *Journal of Neurophysiology*, *89*(5), 2784–2796. <https://doi.org/10.1152/jn.00557.2002>
- VanderWerf, F., Reits, D., Smit, A. E., & Metselaar, M. (2007). Blink Recovery in Patients with Bell's Palsy: A Neurophysiological and Behavioral Longitudinal Study. *Investigative Ophthalmology & Visual Science*, *48*(1), 203–213. <https://doi.org/10.1167/iovs.06-0499>
- Virtanen, P., Gommers, R., Oliphant, T. E., Haberland, M., Reddy, T., Cournapeau, D., Burovski, E., Peterson, P., Weckesser, W., Bright, J., van der Walt, S. J., Brett, M., Wilson, J., Millman, K. J., Mayorov, N., Nelson, A. R. J., Jones, E., Kern, R., Larson, E., ... Vázquez-Baeza, Y. (2020). SciPy 1.0: Fundamental algorithms for scientific computing in Python. *Nature Methods*, *17*(3), 261–272. <https://doi.org/10.1038/s41592-019-0686-2>
- Volk, G. F., Granitzka, T., Kreysa, H., Klingner, C. M., & Guntinas-Lichius, O. (2017). Initial severity of motor and non-motor disabilities in patients with facial palsy: An assessment using patient-reported outcome measures. *European Archives of Oto-Rhino-Laryngology*:

*Official Journal of the European Federation of Oto-Rhino-Laryngological Societies (EUFOS):
Affiliated with the German Society for Oto-Rhino-Laryngology - Head and Neck Surgery,
274(1), 45–52. <https://doi.org/10.1007/s00405-016-4018-1>*